

# NRL 0280-0700

Air-water chiller

Cooling capacity 53 ÷ 194 kW



- Low noise levels in silenced versions
- High efficiency also at partial loads
- Night mode
- Compact dimensions



## DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications. The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

## VERSIONS

- ° Standard
- ▲ High efficiency
- Silenced high efficiency
- Standard silenced

## FEATURES

### Operating field

Operation at full load up to 46 °C external air temperature. Unit can produce chilled water (up to -10°C of water produced in some versions).

### Dual-circuit unit

The units according to the size are mono or dual-circuit, to ensure maximum efficiency both at full load and at partial load.

### Electronic expansion valve

The possibility to use electronic expansion valve, available to configurator, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

### Integrated hydronic kit

Integrated hydronic kit containing the main hydraulic components; available with various configurations with one or two pumps, with high or low head and storage tank, to obtain a solution that allows you to save money and to facilitate installation.

## CONTROL

Microprocessor adjustment, with keyboard and LCD display, for easy access on the unit is a menu available in several languages.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.

- **Night Mode:** it is possible to set a silenced operation profile. Perfect for night operation since it guarantees greater acoustic comfort in the evenings, and a high efficiency in the time of greater load.
- **Night Mode for standard versions is mandatory DCPX accessory (standard on all low noise versions) or "J" inverter fan**

## ACCESSORIES

**AER485P1:** RS-485 interface for supervision systems with MODBUS protocol.

**AERBACP:** Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

**AERNET:** The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.

**MULTICHILLER\_EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

**PGD1:** Allows you to control the unit at a distance.

**DCPX:** Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer.

**GP:** Anti-intrusion grid.

**VT:** Anti-vibration supports.

## FACTORY FITTED ACCESSORIES

**DRE:** Electronic device for peak current reduction.

**RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

**PRM1:** It is a manual pressure switch electrically wired in series with the existing automatic high pressure switch on the compressor discharge pipe.

## COMPATIBILITY WITH VMF SYSTEM

For more information about VMF system, refer to the dedicated documentation.

## ACCESSORIES COMPATIBILITY

Model	Ver	0280	0300	0330	0350	0500	0550	0600	0650	0700
AER485P1	°,A					.	.	.	.	.
	E,L	.	.	.	.	.	.	.	.	.
AERBACP	°,A					.	.	.	.	.
	E,L	.	.	.	.	.	.	.	.	.
AERNET	°,A					.	.	.	.	.
	E,L	.	.	.	.	.	.	.	.	.
MULTICHILLER_EVO	°,A					.	.	.	.	.
	E,L	.	.	.	.	.	.	.	.	.
PGD1	°,A					.	.	.	.	.
	E,L	.	.	.	.	.	.	.	.	.

### Condensation control temperature

Ver	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Fans: °</b>									
°,A	-	-	-	-	DCPX64	DCPX64	DCPX64	DCPX64	DCPX64
E,L	Inverter	Inverter	Inverter	Inverter	As standard				
<b>Fans: M</b>									
°	-	-	-	-	DCPX64	DCPX64	DCPX64	DCPX64	DCPX64
A	-	-	-	-	DCPX64	DCPX64	DCPX64	DCPX64	DCPX65
E,L	DCPX63	DCPX63	DCPX63	DCPX63	As standard				

### Antivibration

Ver	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Integrated hydronic kit: 00, P1, P2, P3, P4</b>									
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11
A	-	-	-	-	VT11	VT11	VT11	VT11	VT22
E,L	VT17	VT17	VT17	VT17	VT11	VT11	VT11	VT11	VT22
<b>Integrated hydronic kit: 01, 02, 03, 04, 05, 06, 07, 08, 09</b>									
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11
E,L	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT22

### Anti-intrusion grid

Ver	0280	0300	0330	0350	0500	0550	0600	0650	0700
°	-	-	-	-	GP2x2 (1)				
A	-	-	-	-	GP2x2 (1)	GP2x2 (1)	GP2x2 (1)	GP2x2 (1)	GP2x3 (1)
E	GP3	GP4	GP4	GP4	GP2x2 (1)	GP2x2 (1)	GP2x2 (1)	GP2x2 (1)	GP2x3 (1)
L	GP3	GP3	GP3	GP3	GP2x2 (1)				

(1) x \_ indicates the quantity to buy

### Device for peak current reduction

Ver	0280	0300	0330	0350	0500	0550	0600	0650	0700
°,A	-	-	-	-	DRE501 (1)	DRE551 (1)	DRE601 (1)	DRE651 (1)	DRE701 (1)
E,L	DRE281 (1)	DRE301 (1)	DRE331 (1)	DRE351 (1)	DRE501 (1)	DRE551 (1)	DRE601 (1)	DRE651 (1)	DRE701 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x or x 3 (if present) indicates the quantity to be ordered.

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

Field	Description
1,2,3	<b>NRL</b>
4,5,6,7	<b>Size</b> 0280, 0300, 0330, 0350, 0500, 0550, 0600, 0650, 0700
8	<b>Operating field</b> <ul style="list-style-type: none"> <li>◦ Standard mechanic thermostatic valve (1)</li> <li>X Electronic thermostatic expansion valve (1)</li> <li>Y Low temperature mechanic thermostatic valve (2)</li> </ul>
9	<b>Model</b> <ul style="list-style-type: none"> <li>◦ Cooling only</li> <li>C Motocondensing unit</li> </ul>
10	<b>Heat recovery</b> <ul style="list-style-type: none"> <li>◦ Without heat recovery</li> <li>D With desuperheater (3)</li> <li>T With total recovery</li> </ul>
11	<b>Version</b> <ul style="list-style-type: none"> <li>◦ Standard</li> <li>A High efficiency</li> <li>E Silenced high efficiency</li> <li>L Standard silenced (4)</li> </ul>
12	<b>Coils</b> <ul style="list-style-type: none"> <li>◦ Copper-aluminium</li> <li>R Copper pipes-copper fins</li> <li>S Copper pipes-Tinned copper fins</li> <li>V Copper pipes-Coated aluminium fins</li> </ul>
13	<b>Fans</b> <ul style="list-style-type: none"> <li>◦ Standard (5)</li> <li>J Inverter (6)</li> <li>M Oversized (7)</li> </ul>
14	<b>Power supply</b> <ul style="list-style-type: none"> <li>◦ 400V ~ 3 50Hz with magnet circuit breakers</li> <li>1 220V~ 3 50Hz with magnet circuit breakers</li> </ul>
15,16	<b>Integrated hydronic kit</b> <ul style="list-style-type: none"> <li>00 Without hydronic kit</li> <li><b>Kit with storage tank and pump/s</b> <ul style="list-style-type: none"> <li>01 Storage tank with low head pump</li> <li>02 Storage tank with low head pump + stand-by pump</li> <li>03 Storage tank with high head pump</li> <li>04 Storage tank with high head pump + stand-by pump</li> </ul> </li> <li><b>Kit with pump/s and storage tank with holes for heaters</b> <ul style="list-style-type: none"> <li>05 Storage tank with holes for heaters and single low head pump (8)</li> <li>06 Storage tank with holes for heaters and pump low head + stand-by pump (8)</li> <li>07 Storage tank with holes for heaters and single high head pump (8)</li> <li>08 Storage tank with holes for heaters and pump high head + stand-by pump (8)</li> </ul> </li> <li><b>Double loop</b> <ul style="list-style-type: none"> <li>09 Double loop</li> </ul> </li> <li><b>Kit with pump/s</b> <ul style="list-style-type: none"> <li>P1 Single pump low head</li> <li>P2 Pump low head + stand-by pump</li> <li>P3 Single pump high head</li> <li>P4 Pump high head + stand-by pump</li> </ul> </li> </ul>

(1) Water produced from 4 °C ÷ 18 °C

(2) Water produced from 4 °C ÷ -6 °C for °L version; 4 °C ÷ -8 °C for E version; 4 °C ÷ -10 °C for A version

(3) For "YT", "ZT", "YD" and "ZD" recovery versions, contact the headquarters; Warning: on the recovery side, a minimum input temperature of 35°C must always be guaranteed on the heat exchanger. For more information about the unit operating range, refer to the Magellano selection program

(4) The size up 0280 ÷ 0350 are only available in the silenced versions "L/E" with inverer fans

(5) As standard in sizes fom 0500 ÷ 0750

(6) Standard for size 0280 ÷ 0350, without useful static pressure, option for other size with useful static pressure.

(7) Available only for size from 0280 to 0350

(8) Storage tanks with holes for supplementary heaters (not provided) are sent from the factory with plastic protection caps. Before loading the system, if the installation of one or all resistances is not expected, all plastic caps must be replaced with the special caps, commonly commercially available.

## PERFORMANCE SPECIFICATIONS

### NRL - °

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Cooling performance 12°C / 7°C(1)</b>									
Cooling capacity	kW	-	-	-	-	96,7	102,6	125,7	136,7
Input power	kW	-	-	-	-	35,4	38,9	46,7	54,7
Cooling total input current	A	-	-	-	-	63,0	67,0	81,0	88,0
EER	W/W	-	-	-	-	2,73	2,64	2,69	2,50
Water flow rate system side	l/h	-	-	-	-	16666	17697	21648	23538
Pressure drop system side	kPa	-	-	-	-	53	59	64	74

(1) Data EN 14511:2018; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRL - L

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Cooling performance 12°C / 7°C(1)</b>									
Cooling capacity	kW	52,8	62,8	67,8	80,7	86,8	92,7	112,6	126,7
Input power	kW	20,6	22,9	26,5	28,9	38,9	43,0	51,5	58,3
Cooling total input current	A	36,0	40,0	44,0	51,0	70,0	75,0	90,0	99,0
EER	W/W	2,56	2,74	2,56	2,79	2,23	2,16	2,19	2,19
Water flow rate system side	l/h	9106	10824	11683	13917	14948	15978	19415	21820
Pressure drop system side	kPa	51	46	54	55	43	48	51	52

(1) Data EN 14511:2018; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRL - A

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Cooling performance 12°C / 7°C(1)</b>									
Cooling capacity	kW	-	-	-	-	97,7	103,7	128,7	142,7
Input power	kW	-	-	-	-	30,7	34,8	40,8	45,4
Cooling total input current	A	-	-	-	-	55,0	60,0	71,0	77,0
EER	W/W	-	-	-	-	3,19	2,98	3,15	3,14
Water flow rate system side	l/h	-	-	-	-	16838	17868	22164	24569
Pressure drop system side	kPa	-	-	-	-	44	49	54	60

(1) Data EN 14511:2018; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRL - E

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Cooling performance 12°C / 7°C(1)</b>									
Cooling capacity	kW	56,8	64,8	73,8	82,8	89,8	94,8	116,7	128,7
Input power	kW	17,1	19,7	22,1	25,5	33,5	37,1	44,9	52,3
Cooling total input current	A	30,0	34,0	37,0	45,0	60,0	64,0	78,0	89,0
EER	W/W	3,33	3,29	3,34	3,24	2,68	2,55	2,60	2,46
Water flow rate system side	l/h	9793	11168	12714	14260	15463	16322	20102	22164
Pressure drop system side	kPa	43	39	35	44	37	41	44	49

(1) Data EN 14511:2018; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRL - C

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Model: °</b>									
<b>Cooling performance 12°C / 7°C(1)</b>									
Cooling capacity	°,A,E,L	kW	-	-	-	-	-	-	-
Input power	°,A,E,L	kW	-	-	-	-	-	-	-
Input current	°,A,E,L	A	-	-	-	-	-	-	-
EER	°,A,E,L	W/W	-	-	-	-	-	-	-

### Model: C

<b>Cooling performance 12°C / 7°C(1)</b>											
	°	kW	-	-	-	-	100,0	106,0	130,0	141,0	161,0
Cooling capacity	A	kW	-	-	-	-	101,0	107,0	133,0	147,0	168,0
	E	kW	59,0	67,0	76,0	85,0	93,0	98,0	121,0	133,0	155,0
	L	kW	55,0	65,0	70,0	83,0	90,0	96,0	116,0	131,0	148,0
	°	kW	-	-	-	-	35,1	38,5	46,3	54,4	60,5
Input power	A	kW	-	-	-	-	30,5	34,5	40,5	45,0	52,8
	E	kW	17,0	19,6	22,0	25,3	33,4	37,0	44,7	52,1	57,1
	L	kW	20,5	22,8	26,3	28,7	38,8	42,9	51,4	58,1	65,4
	°	A	-	-	-	-	64,0	68,0	82,0	89,0	101,0
Input current	A	A	-	-	-	-	56,0	61,0	72,0	78,0	91,0
	E	A	35,0	39,0	43,0	49,0	71,0	65,0	79,0	90,0	98,0
	L	A	36,0	40,0	44,0	52,0	61,0	75,0	91,0	100,0	112,0
	°	W/W	-	-	-	-	2,85	2,75	2,81	2,59	2,66
EER	A	W/W	-	-	-	-	3,31	3,10	3,28	3,27	3,18
	E	W/W	3,47	3,42	3,45	3,36	2,78	2,65	2,71	2,55	2,71
	L	W/W	2,68	2,85	2,66	2,89	2,32	2,24	2,26	2,25	2,26

(1) Evaporating temperature 5 °C, External air 35 °C

## ENERGY INDICES (REG. 2016/2281 EU)

Size		0280	0300	0330	0350	0500	0550	0600	0650	0700	
<b>SEER - 12/7 (EN14825:2018) with standard fans (1)</b>											
SEER	°	W/W	-	-	-	-	3,53	3,42	3,66	3,45	3,52
	A	W/W	-	-	-	-	3,98	3,87	3,91	3,90	3,87
	E	W/W	3,80	3,84	3,82	3,82	3,90	3,83	3,83	3,84	3,84
	L	W/W	3,19	3,45	3,24	3,30	3,40	3,31	3,47	3,31	3,36
Seasonal efficiency	°	%	-	-	-	-	138,0%	133,9%	143,3%	135,0%	137,6%
	A	%	-	-	-	-	156,3%	151,8%	153,3%	153,1%	151,7%
	E	%	149,1%	150,7%	149,9%	149,9%	152,9%	150,1%	150,0%	150,5%	150,4%
	L	%	124,6%	134,9%	126,7%	128,8%	133,1%	129,3%	135,9%	129,3%	131,5%
<b>SEER - 23/18 (EN14825: 2018) with standard fans (2)</b>											
SEER	°,L	W/W	-	-	-	-	-	-	-	-	
	A	W/W	-	-	-	-	4,34	4,19	4,73	4,71	4,59
	E	W/W	4,55	4,70	4,62	4,47	4,32	4,18	4,67	4,61	4,50
Seasonal efficiency	°,L	%	-	-	-	-	-	-	-	-	
	A	%	-	-	-	-	170,7%	164,6%	186,2%	185,2%	180,5%
	E	%	178,9%	184,9%	181,6%	175,9%	169,7%	164,0%	183,8%	181,3%	177,1%
<b>SEPR - (EN14825: 2018) High temperature with standard fans (2)</b>											
SEPR	°,L	W/W	-	-	-	-	-	-	-	-	
	A	W/W	-	-	-	-	6,05	5,66	5,94	5,91	5,74
	E	W/W	5,81	5,94	5,85	5,66	5,62	5,34	5,76	5,71	5,54

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Calculation performed with FIXED water flow rate.

## ELECTRIC DATA


Size		0280	0300	0330	0350	0500	0550	0600	0650	0700	
<b>Electric data</b>											
Maximum current (FLA)	°,A	A	-	-	-	-	76,0	81,0	100,0	112,0	122,0
	E	A	46,0	53,0	58,0	63,0	76,0	76,0	100,0	112,0	122,0
	L	A	46,0	53,0	58,0	63,0	76,0	81,0	100,0	112,0	122,0
Peak current (LRA)	°,A	A	-	-	-	-	214,0	220,0	232,0	243,0	261,0
	E	A	155,0	184,0	190,0	200,0	214,0	214,0	232,0	243,0	261,0
	L	A	155,0	184,0	190,0	200,0	214,0	220,0	232,0	243,0	261,0

## GENERAL TECHNICAL DATA

Size		0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Compressor</b>										
Type	°A	type	-	-	-	-	Scroll	Scroll	Scroll	Scroll
	E,L	type	Scroll							
Compressor regulation	°A	Type	-	-	-	-	On-Off	On-Off	On-Off	On-Off
	E,L	Type	On-Off							
Number	°A	no.	-	-	-	-	3	3	4	4
	E,L	no.	2	2	2	2	3	3	4	4
Circuits	°A	no.	-	-	-	-	2	2	2	2
	E,L	no.	2	2	2	2	2	2	2	2
Refrigerant	°A	type	-	-	-	-	R410A	R410A	R410A	R410A
	E,L	type	R410A							
<b>System side heat exchanger</b>										
Type	°A	type	-	-	-	-	Brazed plate	Brazed plate	Brazed plate	Brazed plate
	E,L	type	Brazed plate							
Number	°A	no.	-	-	-	-	1	1	1	1
	E,L	no.	1	1	1	1	1	1	1	1
<b>System side hydraulic connections</b>										
Connections (in/out)	°A,E,L	Type	Grooved joints							
Sizes (in/out)	°A	Ø	-	-	-	-	2"1/2	2"1/2	2"1/2	2"1/2
	E,L	Ø	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2	2"1/2
<b>Fan</b>										
Type	°A	type	-	-	-	-	Axial	Axial	Axial	Axial
	E,L	type	Axial							
Number	°	no.	-	-	-	-	2	2	2	2
	A	no.	-	-	-	-	2	2	2	3
	E	no.	6	6	8	8	2	2	2	3
	L	no.	4	4	4	6	2	2	2	2
Air flow rate	°	m³/h	-	-	-	-	34600	34600	34600	33600
	A	m³/h	-	-	-	-	34100	34100	32600	32600
	E	m³/h	22000	22000	27000	27000	21100	22200	21800	22800
	L	m³/h	14200	14200	14200	20200	28400	28700	27700	29400
<b>Sound data calculated in cooling mode (1)</b>										
Sound power level	°	dB(A)	-	-	-	-	82,0	82,0	82,0	83,0
	A	dB(A)	-	-	-	-	82,0	82,0	82,0	85,0
	E	dB(A)	74,0	74,0	75,0	76,0	74,0	74,0	74,0	77,0
	L	dB(A)	73,0	73,0	74,0	75,0	77,0	77,0	78,0	78,0
Sound pressure level (10 m)	°	dB(A)	-	-	-	-	50,1	50,1	50,1	51,1
	A	dB(A)	-	-	-	-	50,1	50,1	50,1	53,0
	E	dB(A)	42,3	42,2	43,2	44,2	42,1	42,1	42,1	45,0
	L	dB(A)	41,3	41,3	42,3	43,3	45,1	45,1	45,1	46,1

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

## DIMENSIONS

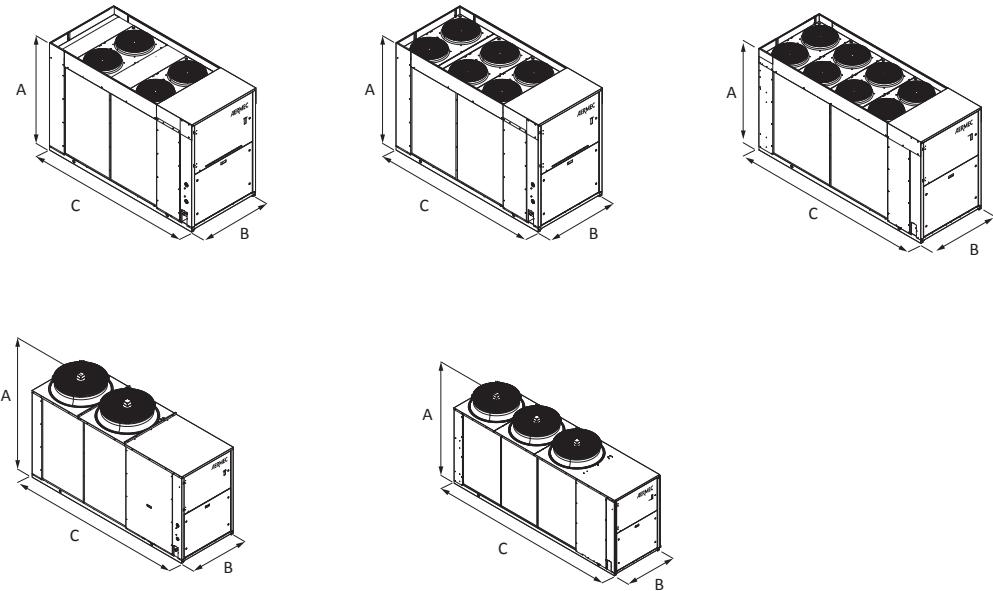

Size	0280	0300	0330	0350	0500	0550	0600	0650	0700
<b>Dimensions and weights</b>									
A	°A mm	-	-	-	-	1875	1875	1875	1875
	E,L mm	1606	1606	1606	1606	1875	1875	1875	1875
B									
	°A mm	-	-	-	-	1100	1100	1100	1100
	E,L mm	1100	1100	1100	1100	1100	1100	1100	1100
C									
	° mm	-	-	-	-	3010	3010	3010	3010
	A mm	-	-	-	-	3010	3010	3010	4010
	E mm	2450	2950	2950	2950	3010	3010	3010	4010
	L mm	2450	2450	2450	2450	3010	3010	3010	3010
<b>Weights</b>									
Without hydronic kit	° kg	-	-	-	-	868	872	968	983
	A kg	-	-	-	-	955	959	1142	1155
	E kg	686	751	761	767	955	959	1142	1323
	L kg	675	684	688	704	868	872	968	983

Aermec reserves the right to make any modifications deemed necessary.  
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
[www.aermec.com](http://www.aermec.com)